
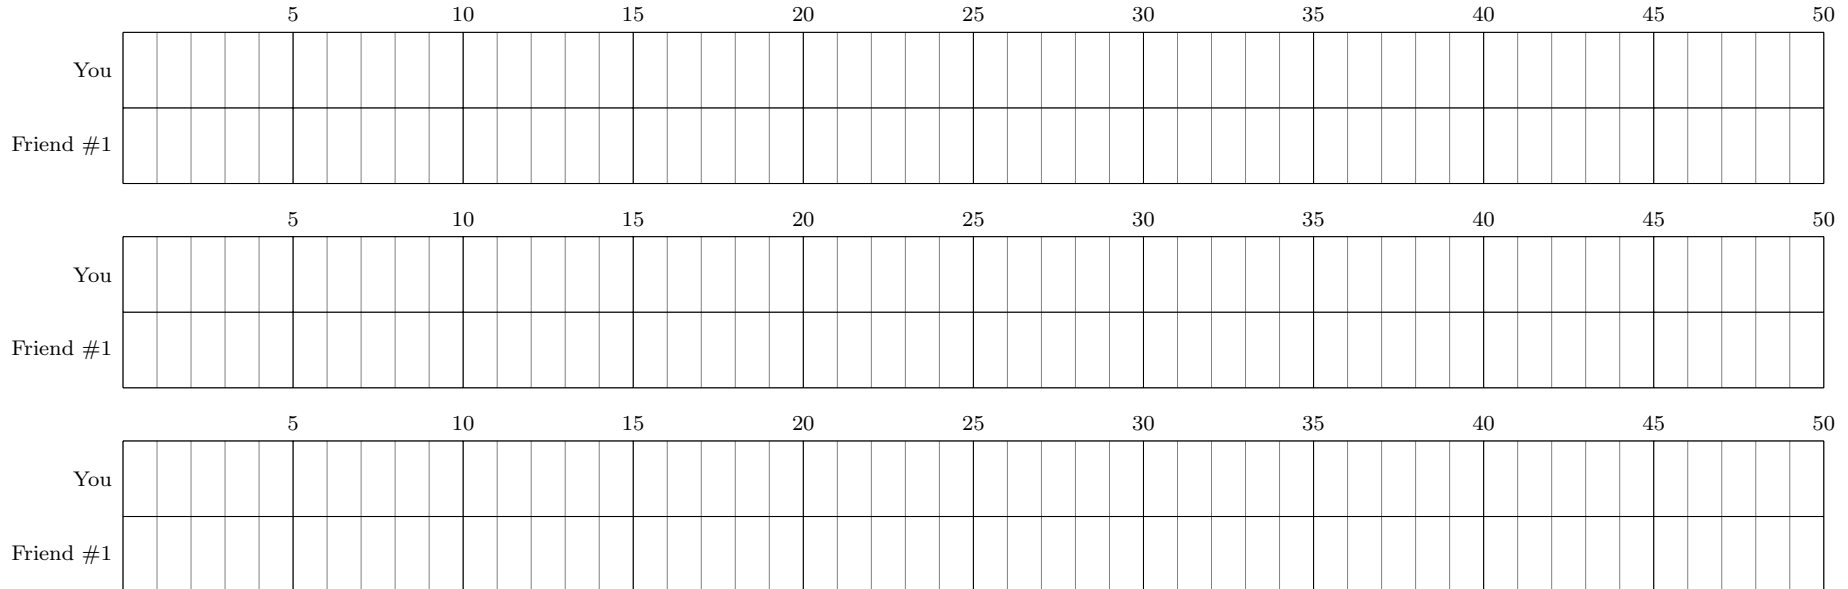


Space House! Easy version (graph already drawn)

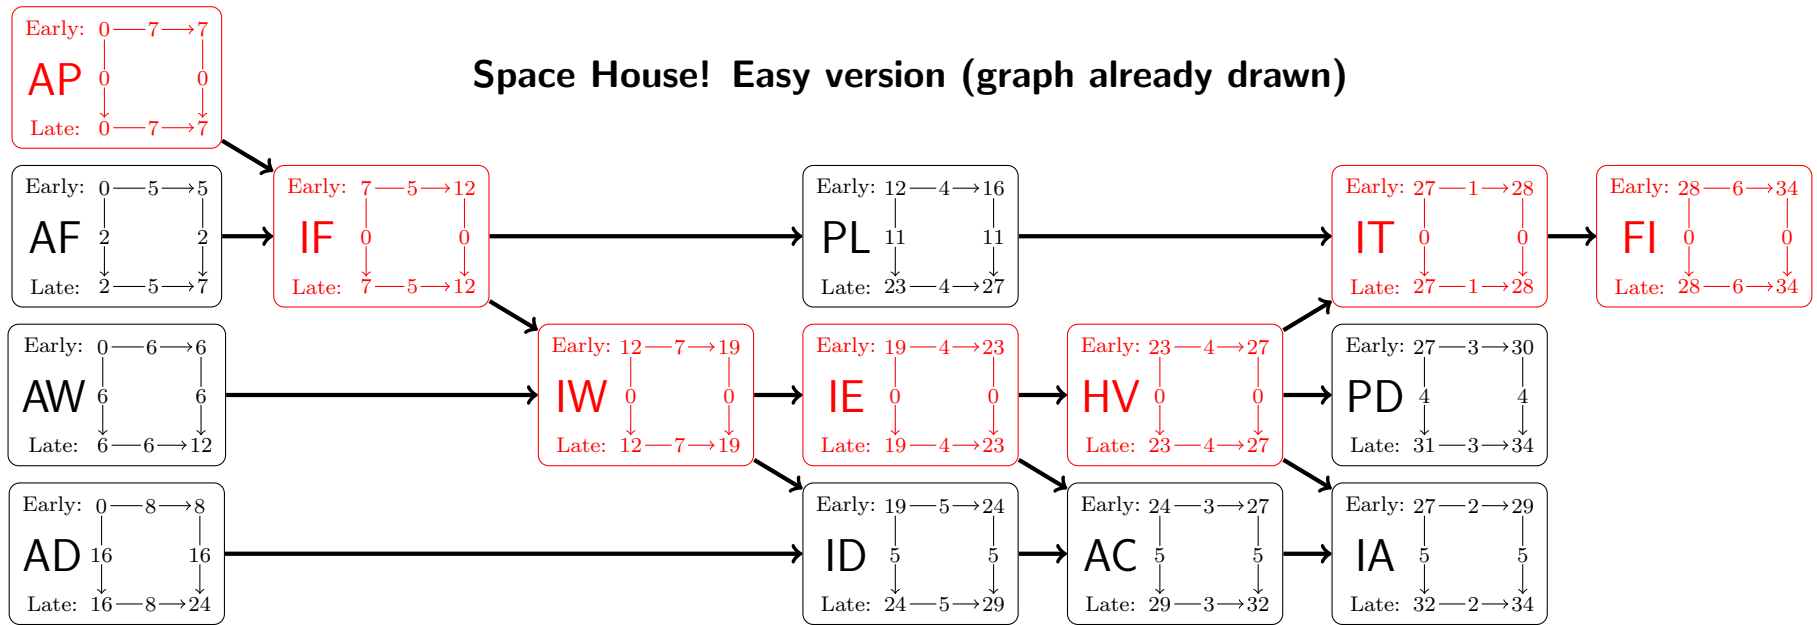

Space House! Hard version (draw your own graph)

Task	Duration	Finish first
AP: Assemble Pad	7 min	Nothing
AF: Assemble Flooring	5 min	Nothing
AW: Assemble Wall Units	6 min	Nothing
AD: Assemble Dome Frame	8 min	Nothing
IF: Install Flooring	5 min	AP, AF
IW: Install Wall Units	7 min	IF, AW
ID: Install Dome Frame	5 min	AD, IW
PL: Install plumbing	4 min	IF
IE: Install electrical	4 min	IW
AC: Install compressor	3 min	IE, ID
HV: Install ducts	4 min	IE
IT: Install toilets	1 min	PL, HV
FI: Finish interior	6 min	IT
PD: Pressurize dome	3 min	HV
IA: Install appliances	2 min	HV, AC

How fast can you get it done?

